
Cherry Island Landfill, Wilmington, Delaware: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

1.5 MW	2	7 ac	140k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $420k	$7k to $14k	$7k to $434k

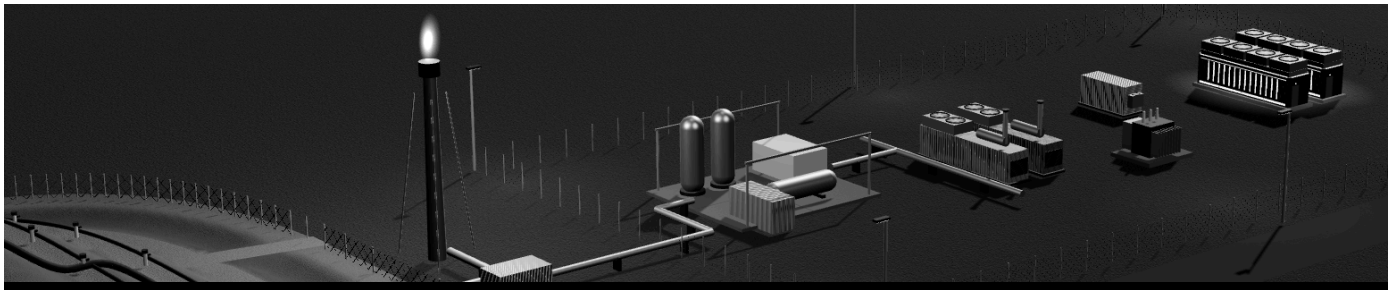

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=554&CH4=49.9

THE MATH

Landfill gas flared beyond the existing gas user (FY2025)	554 scfm
Methane content	49.9%
Energy in the gas	16.8 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 1.5 MW
Compute (power less cooling and losses, /1.2)	about 1.3 MW
Compute modules (about 1 MW each)	2
Gas engines (running plus one spare)	2 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 7 acres
Gas bought per year (95% run time)	140k MMBtu
Gas payment, up to $3.00/MMBtu	up to $420k
Land lease at $1,000 to $2,000 per acre per year	$7k to $14k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- When the existing gas agreement ends, and whether the planned gas plant upgrade takes the flared share
- DNREC air permit and a revision of Title V permit AQM-003/00111
- City of Wilmington zoning
- Space for a fenced parcel near the flare

Source: DSWA FY2025 annual report chart (about 291 million cubic feet flared, about 554 scfm). Methane from EPA's Greenhouse Gas Reporting Program. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.