
Broome County Landfill, Binghamton, New York: site sizing

What the landfill gas the site collects could power, how much land it would take, and what it could earn each year.

4.3 MW	4	10 ac	398k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $1.19M	$10k to $20k	$10k to $1.21M

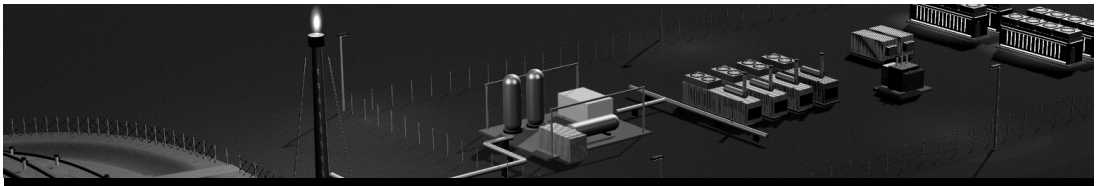

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=1486&CH4=53

THE MATH

Landfill gas collected (2024), nearly all used today by the engine plant	1,486 scfm
Methane content (2024)	53%
Energy in the gas	47.8 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 4.3 MW
Compute (power less cooling and losses, /1.2)	about 3.6 MW
Compute modules (about 1 MW each)	4
Gas engines (running plus one spare)	4 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 10 acres
Gas bought per year (95% run time)	398k MMBtu
Gas payment, up to $3.00/MMBtu	up to $1.19M
Land lease at $1,000 to $2,000 per acre per year	$10k to $20k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- The engine plant on site uses nearly all of this gas today (only about 16 scfm was flared in 2024), so this sizing applies once the current agreements end
- When the current gas agreements end (County records point to about 2029)
- Gas from any landfill expansion
- Space for a fenced parcel near the flare
- Gas quality (siloxanes, H2S) for engines

Source: Broome County, 2024 Solid Waste Management Facility annual report to NYSDEC (facility 04LS0011), Section 11 Landfill Gas: 772,750,351 cubic feet to the engines and 8,492,630 cubic feet flared, at 53.0% methane, about 1,486 scfm in all: https://extapps.dec.ny.gov/fs/projects/SWMF/Annual%20Reports_Solid%20Waste%20Management%20Facility/Annual%20Reports_by%20Activity%20Type/Landfill/Landfill%20Annual%20Reports%20-%202024/R7/04LS0011_Broome_County_msw_R7_2024.2025-2-28.AR.pdf (seen 2026-11-13). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.