
Camino Real Landfill, Sunland Park, New Mexico: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

3.5 MW	4	9 ac	320k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $961k	$9k to $18k	$9k to $980k

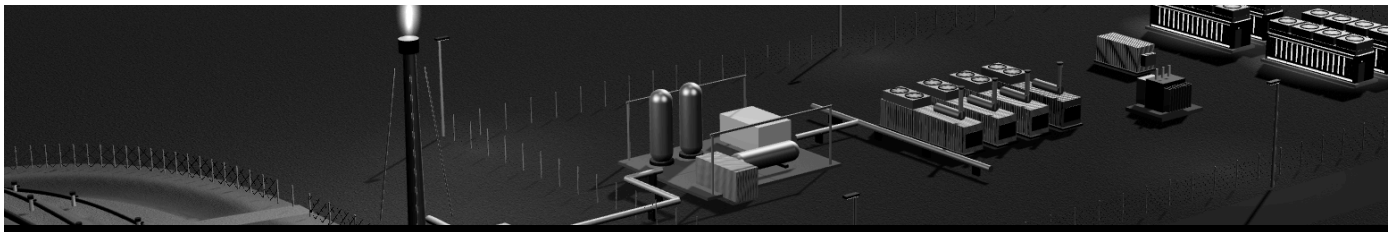

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=1408&CH4=44.8

THE MATH

Landfill gas collected, to the flare since the engine plant retired (2023)	1,408 scfm
Methane content	44.8%
Energy in the gas	38.5 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 3.5 MW
Compute (power less cooling and losses, /1.2)	about 2.9 MW
Compute modules (about 1 MW each)	4
Gas engines (running plus one spare)	4 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 9 acres
Gas bought per year (95% run time)	320k MMBtu
Gas payment, up to $3.00/MMBtu	up to $961k
Land lease at $1,000 to $2,000 per acre per year	$9k to $18k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Whether the two Caterpillar 3520C engines and grid tie are still on the pad
- NMED Air Quality Bureau construction permit under 20.2.72 NMAC; NSPS Subpart JJJJ
- Change to Title V operating permit P186L (NSR 7592), 40 CFR 60 Subpart Cf and NESHAP Subpart AAAA; NMED Solid Waste Bureau review
- City of Sunland Park zoning and site plan review; statewide data center moratorium bill planned for January 2027

Source: EPA Greenhouse Gas Reporting Program, 2023 (facility 1003362): about 1,408 scfm collected at 44.8% methane. EIA lists the 3.2 MW engine plant (plant 60696) as retired in February 2025. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.