
Solid Waste Authority of Palm Beach County, Site 7 landfill, West Palm Beach, Florida: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

2.6 MW	3	8 ac	242k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $725k	$8k to $16k	$8k to $742k

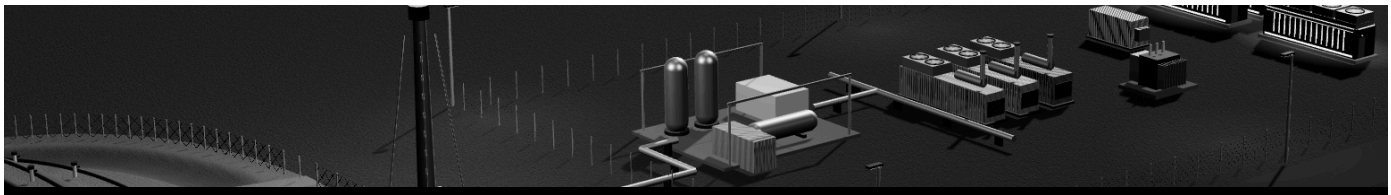

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=1367&CH4=34.6

THE MATH

Landfill gas flared beside the biosolids dryers (2023, estimate)	1,367 scfm
Methane content (2023)	34.6%
Energy in the gas	29.1 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 2.6 MW
Compute (power less cooling and losses, /1.2)	about 2.2 MW
Compute modules (about 1 MW each)	3
Gas engines (running plus one spare)	3 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	242k MMBtu
Gas payment, up to $3.00/MMBtu	up to $725k
Land lease at $1,000 to $2,000 per acre per year	$8k to $16k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Whether the flared gas is uncommitted beyond the dryers' needs
- Lean gas (about 35% methane): engines rated for lean gas
- Space in the Renewable Energy Park
- Gas quality (siloxanes, H2S) for engines

Source: Estimate from EPA data: about 2,284 scfm collected in 2023 at 34.6% methane (EPA Greenhouse Gas Reporting Program, subpart HH, facility 1007820: https://data.epa.gov/efservice/hh_gas_collection_system_detls/FACILITY_ID/1007820/JSON, seen 2026-11-13), less about 917 scfm to the biosolids dryers (EPA LMOP database, September 2024 release: https://www.epa.gov/system/files/documents/2024-09/lmopcompositedata.xlsx). LMOP listed about 1,472 scfm flared in 2022. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.