
# Chicopee Landfill, Chicopee, Massachusetts: a first sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

| 2.4 MW | 3 | 8 ac | 220k |
|---|---|---|---|
| POWER FROM THE GAS | COMPUTE MODULES | LAND NEEDED | MMBTU BOUGHT / YR |

| GAS SALE, PER YEAR | LAND LEASE, PER YEAR | TOTAL TO THE OWNER, PER YEAR |
|---|---|---|
| up to $165k | $8k to $16k | $8k to $181k |

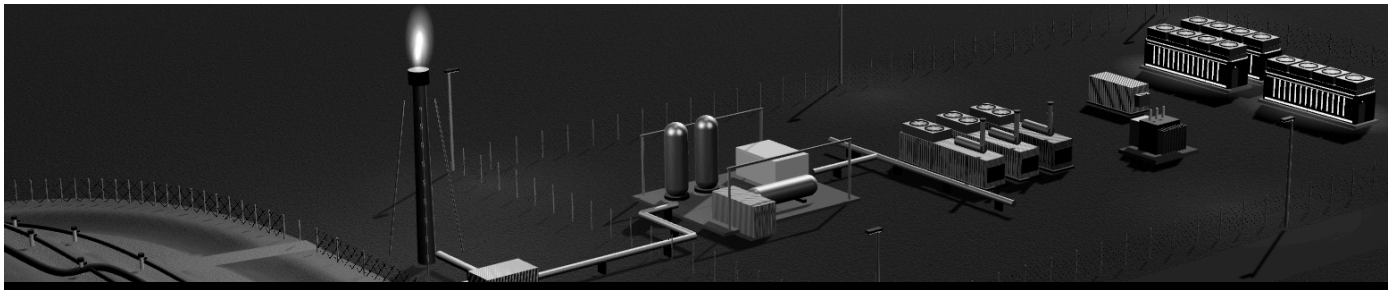

YOUR SITE IN OUR LIVE 3D MODEL ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=906&CH4=48.3

## THE MATH

| | |
|---|---|
| Landfill gas collected (2023); likely lower today since the landfill closed | 906 scfm |
| Methane content | 48.3% |
| Energy in the gas | 26.4 MMBtu per hour |
| Power at a heat rate of 11,000 Btu/kWh | about 2.4 MW |
| Compute (power less cooling and losses, /1.2) | about 2.0 MW |
| Compute modules (about 1 MW each) | 3 |
| Gas engines (running plus one spare) | 3 at 1.6 MW |
| Land: 5 acres plus 1.2 acres per MW | about 8 acres |
| Gas bought per year (95% run time) | 220k MMBtu |
| Gas payment, up to $0.75/MMBtu | up to $165k |
| Land lease at $1,000 to $2,000 per acre per year | $8k to $16k |

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

## WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

## WORTH CHECKING

- Gas flow today (closed landfill, falling) and whether Ameresco still holds gas rights
- MassDEP air plan approval under 310 CMR 7.02 with NSPS Subpart JJJJ for the engines
- Landfill NESHAP Subpart AAAA gas controls and the MassDEP flare approval (flare A to flare D, applied 2023-11); post-closure review under 310 CMR 19.000
- City of Chicopee zoning special permit and site plan review

**Source:** EPA Greenhouse Gas Reporting Program, 2023 (facility 1007669): about 906 scfm collected at 48.3% methane. EIA's September 2026 data list all four units of the 7.8 MW engine plant (plant 56426) as out of service. This is a first read from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.