
Baytown Landfill, Baytown, Texas: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

2.4 MW	3	8 ac	220k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $661k	$8k to $16k	$8k to $677k

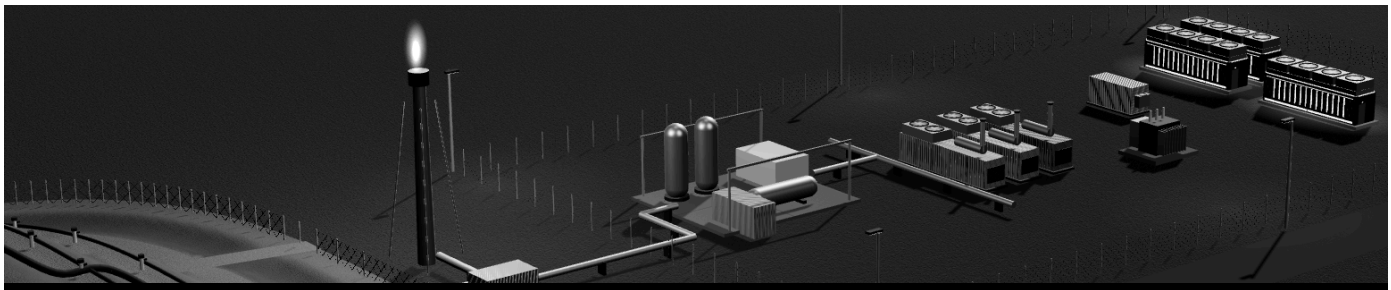

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=1046&CH4=42

THE MATH

Landfill gas collected and destroyed on site (2023)	1,046 scfm
Methane content (2023)	41.7%
Energy in the gas	26.5 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 2.4 MW
Compute (power less cooling and losses, /1.2)	about 2.0 MW
Compute modules (about 1 MW each)	3
Gas engines (running plus one spare)	3 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	220k MMBtu
Gas payment, up to $3.00/MMBtu	up to $661k
Land lease at $1,000 to $2,000 per acre per year	$8k to $16k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Flow fell from about 1,560 scfm (2019) to about 1,050 (2022-2023), then held flat
- Closure about 2037: gas keeps coming after closure, at a falling rate
- Space for a small fenced parcel above flood level

Source: EPA Greenhouse Gas Reporting Program (GHGRP), facility 1007684: 2023 about 1,046 scfm at 41.7% methane, destroyed on site; 2022 about 1,053 scfm at 44.6%. Sized to 2023, the lower year. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.