
Oak Grove Mine, Adger, Jefferson County, Alabama: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

5.0 MW	5	11 ac	456k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $1.37M	$11k to $22k	$11k to $1.39M

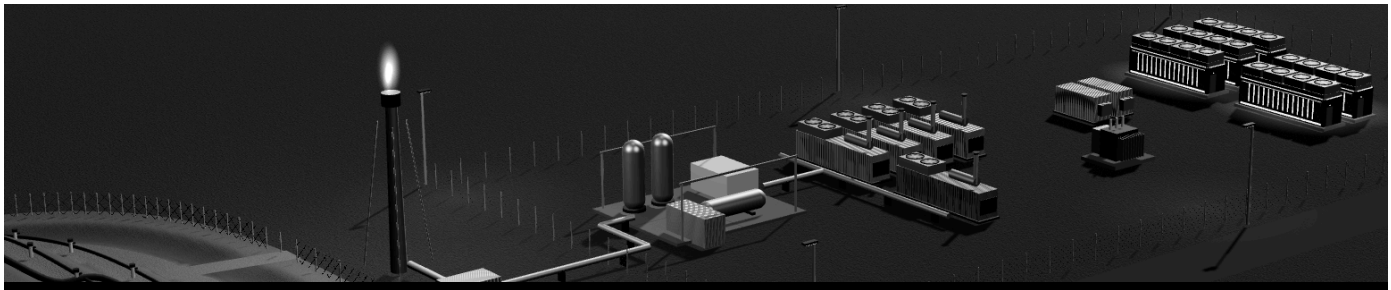

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=1806&CH4=50

THE MATH

Drained methane, first phase (2023)	1,806 scfm
Methane (assumed, basin low end)	50%
Energy in the gas	54.8 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 5.0 MW
Compute (power less cooling and losses, /1.2)	about 4.2 MW
Compute modules (about 1 MW each)	5
Gas engines (running plus one spare)	5 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 11 acres
Gas bought per year (95% run time)	456k MMBtu
Gas payment, up to $3.00/MMBtu	up to $1.37M
Land lease at $1,000 to $2,000 per acre per year	$11k to $22k

Mine gas: methane at about 1,012 Btu per cubic foot. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Drained flow and methane % per well since gas sales stopped in late 2023
- Who holds the gas leases
- A few acres of mine surface near the wells

Source: EPA Greenhouse Gas Reporting Program (GHGRP) subpart FF 2023: about 26,200 t of methane drained by degas wells, about 25,000 t vented (about 3.6 MMcf/d). First phase sized on about 1.3 MMcf/d of methane (shown as 1,806 scfm at an assumed 50%). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.