
# Trinity Oaks Landfill, Dallas, Texas: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

| 1.0 MW | 1 | 6 ac | 90k |
|---|---|---|---|
| POWER FROM THE GAS | COMPUTE MODULES | LAND NEEDED | MMBTU BOUGHT / YR |

| GAS SALE, PER YEAR | LAND LEASE, PER YEAR | TOTAL TO THE OWNER, PER YEAR |
|---|---|---|
| up to $269k | $6k to $12k | $6k to $282k |

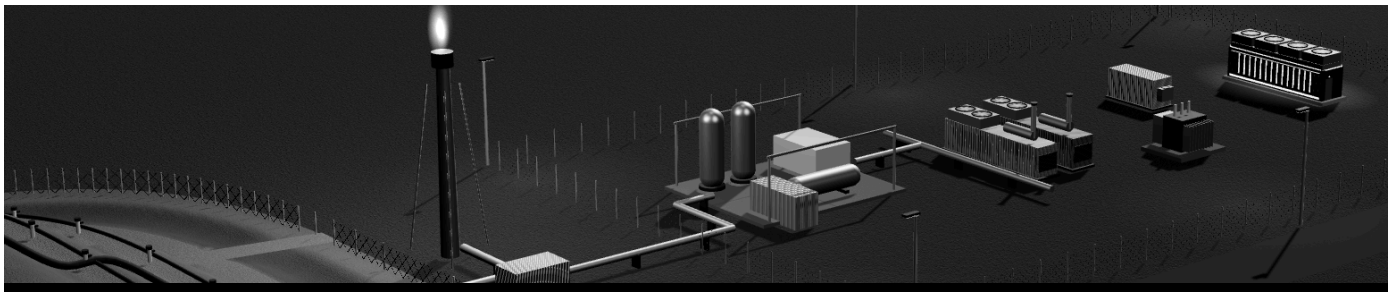

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=539&CH4=32.8

## THE MATH

| | |
|---|---|
| Landfill gas collected and flared (2023) | 539 scfm |
| Methane content (2023) | 32.8% |
| Energy in the gas | 10.8 MMBtu per hour |
| Power at a heat rate of 11,000 Btu/kWh | about 1.0 MW |
| Compute (power less cooling and losses, /1.2) | about 0.8 MW |
| Compute modules (about 1 MW each) | 1 |
| Gas engines (running plus one spare) | 2 at 1.6 MW |
| Land: 5 acres plus 1.2 acres per MW | about 6 acres |
| Gas bought per year (95% run time) | 90k MMBtu |
| Gas payment, up to $3.00/MMBtu | up to $269k |
| Land lease at $1,000 to $2,000 per acre per year | $6k to $12k |

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

## WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

## WORTH CHECKING

- Gas rights and any existing gas agreement
- TCEQ air permit (state data-center permit pause to mid-December 2026)
- Tie-in under the landfill's Title V permit (NSPS Subpart XXX, NESHAP Subpart AAAA)
- County or municipal zoning for the data hall

**Source:** EPA Greenhouse Gas Reporting Program, 2023: about 539 scfm collected at 32.8% methane, all flared since the engine plant shut in July 2014 (EPA Landfill Methane Outreach Program). Low methane: needs a gas test. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.