
# Tullytown Landfill, Tullytown, Pennsylvania: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

| 6.1 MW | 6 | 12 ac | 555k |
|---|---|---|---|
| POWER FROM THE GAS | COMPUTE MODULES | LAND NEEDED | MMBTU BOUGHT / YR |

| GAS SALE, PER YEAR | LAND LEASE, PER YEAR | TOTAL TO THE OWNER, PER YEAR |
|---|---|---|
| up to $1.67M | $12k to $25k | $12k to $1.69M |

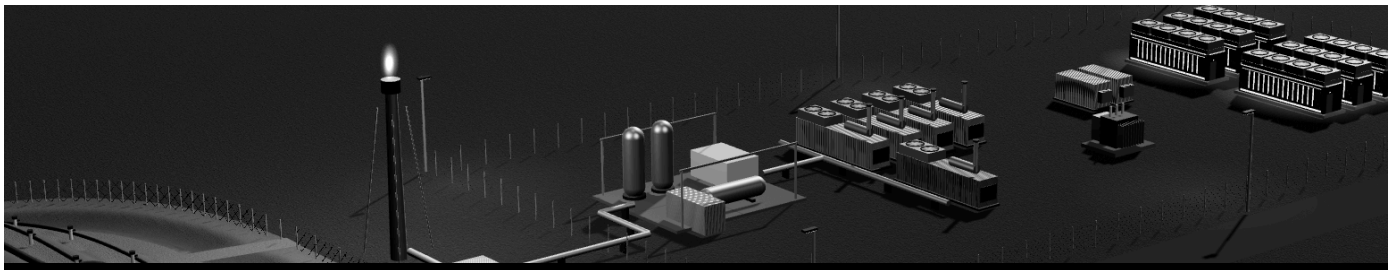

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=2290&CH4=47.6

## THE MATH

| | |
|---|---|
| Landfill gas flared beside the existing engine (today, estimate) | 2,290 scfm |
| Methane content (2023) | 47.6% |
| Energy in the gas | 66.7 MMBtu per hour |
| Power at a heat rate of 11,000 Btu/kWh | about 6.1 MW |
| Compute (power less cooling and losses, /1.2) | about 5.1 MW |
| Compute modules (about 1 MW each) | 6 |
| Gas engines (running plus one spare) | 5 at 1.6 MW |
| Land: 5 acres plus 1.2 acres per MW | about 12 acres |
| Gas bought per year (95% run time) | 555k MMBtu |
| Gas payment, up to $3.00/MMBtu | up to $1.67M |
| Land lease at $1,000 to $2,000 per acre per year | $12k to $25k |

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

## WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

## WORTH CHECKING

- Gas rights and any existing gas agreement
- PA DEP air plan approval (25 Pa. Code Chapter 127)
- Tie-in under the landfill's Title V permit (NSPS Subpart XXX, NESHAP Subpart AAAA)
- County or municipal zoning for the data hall

**Source:** EPA Greenhouse Gas Reporting Program, 2023: about 4,032 scfm collected at 47.6% methane. EPA Landfill Methane Outreach Program: about 3,655 scfm flared in 2022 beside the 1.6 MW engine; carried forward for the closed landfill's decline to about 2,290 scfm today (estimate). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.