
Sullivan County Landfill, Monticello, New York: a first sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

2.1 MW	2	8 ac	195k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
$293k to $488k	$8k to $15k	$301k to $503k

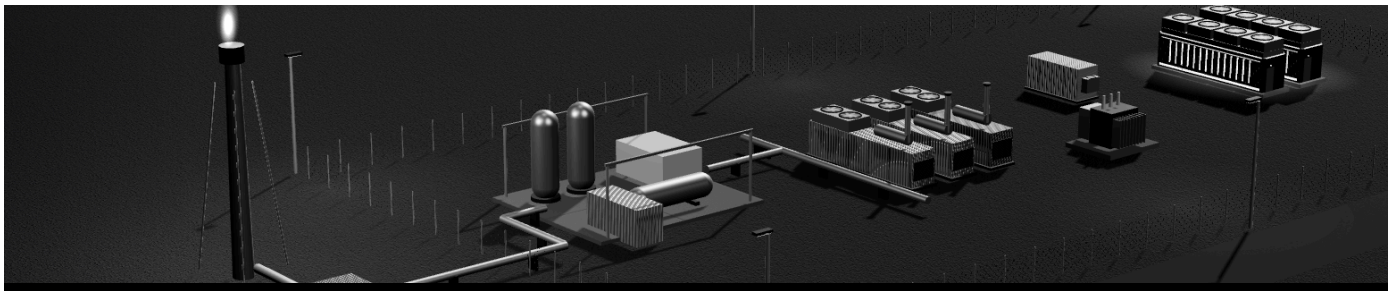

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=859&CH4=45

THE MATH

Landfill gas collected and flared (2016)	859 scfm
Methane content (2016)	45%
Energy in the gas	23.5 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 2.1 MW
Compute (power less cooling and losses, /1.2)	about 1.8 MW
Compute modules (about 1 MW each)	2
Gas engines (running plus one spare)	3 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	195k MMBtu
Gas payment at $1.50 to $2.50 per MMBtu	$293k to $488k
Land lease at $1,000 to $2,000 per acre per year	$8k to $15k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed or floored price.

WORTH CHECKING

- Current flow (data is from 2016; old Village cell and Phase I share one gas system)
- Who holds the gas rights
- How the separate waste-to-energy proposal affects the site
- Space for a small fenced parcel near the flare
- Gas quality (siloxanes, H2S) for engines

Source: EPA Landfill Methane Outreach Program (LMOP) database, September 2024 release (2016 data): gas collected and flared. This is a first read from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.