
Brown Station Road Sanitary Landfill, Upper Marlboro, Maryland: a first sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

7.0 MW	7	13 ac	637k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $1.91M	$13k to $27k	$13k to $1.94M

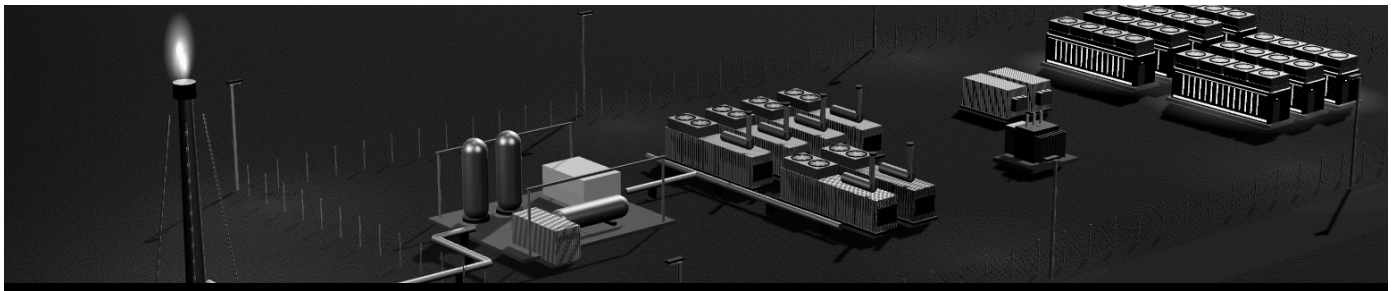

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=2333&CH4=53.7

THE MATH

Landfill gas collected and flared (2022)	2,333 scfm
Methane content (2022)	53.7%
Energy in the gas	76.5 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 7.0 MW
Compute (power less cooling and losses, /1.2)	about 5.8 MW
Compute modules (about 1 MW each)	7
Gas engines (running plus one spare)	6 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 13 acres
Gas bought per year (95% run time)	637k MMBtu
Gas payment, up to $3.00/MMBtu	up to $1.91M
Land lease at $1,000 to $2,000 per acre per year	$13k to $27k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- The on-site engine plants have shut (2018 and 2021); the gas is flared today
- Latest flow after the 2026 flare upgrade
- Space for a small fenced parcel near the flare station
- Gas quality (siloxanes, H2S) for engines

Source: EPA Landfill Methane Outreach Program (LMOP) database, September 2024 release (2022 data): gas collected and flared, no energy project listed. This is a first read from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.