
Chicopee Landfill, Chicopee, Massachusetts: a first sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

2.4 MW	3	8 ac	220k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $660k	$8k to $16k	$8k to $675k

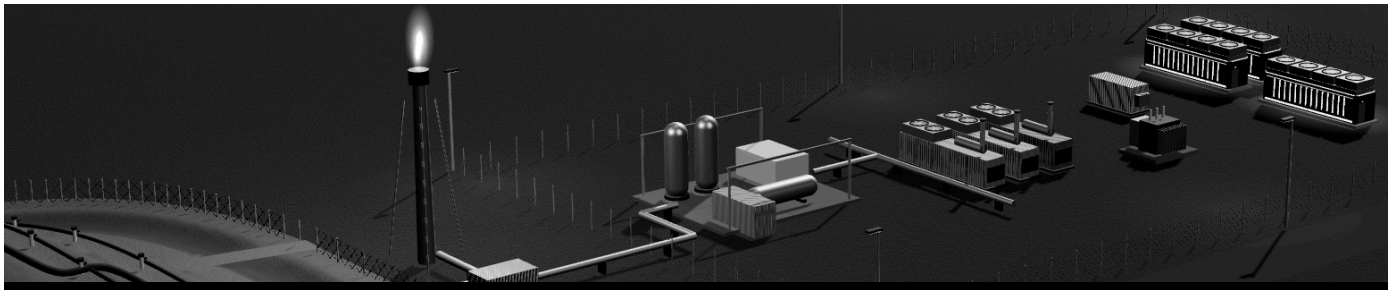

YOUR SITE IN OUR LIVE 3D MODEL ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=906&CH4=48.3

THE MATH

Landfill gas collected (2023); likely lower today since the landfill closed	906 scfm
Methane content	48.3%
Energy in the gas	26.4 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 2.4 MW
Compute (power less cooling and losses, /1.2)	about 2.0 MW
Compute modules (about 1 MW each)	3
Gas engines (running plus one spare)	3 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	220k MMBtu
Gas payment, up to $3.00/MMBtu	up to $660k
Land lease at $1,000 to $2,000 per acre per year	$8k to $16k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Gas flow today (closed landfill, falling) and whether Ameresco still holds gas rights
- MassDEP air plan approval under 310 CMR 7.02 with NSPS Subpart JJJJ for the engines
- Landfill NESHAP Subpart AAAA gas controls and the MassDEP flare approval (flare A to flare D, applied 2023-11); post-closure review under 310 CMR 19.000
- City of Chicopee zoning special permit and site plan review

Source: EPA Greenhouse Gas Reporting Program, 2023 (facility 1007669): about 906 scfm collected at 48.3% methane. EIA's September 2026 data list all four units of the 7.8 MW engine plant (plant 56426) as out of service. This is a first read from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.