
Charlson field pad (T153N R95W Sec 4), McKenzie County, North Dakota: a first sizing

What this gas could power, how much land it would take, and what it could earn each year.

4.2 MW	4	10 ac	316k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $237k	$10k to $20k	$10k to $257k

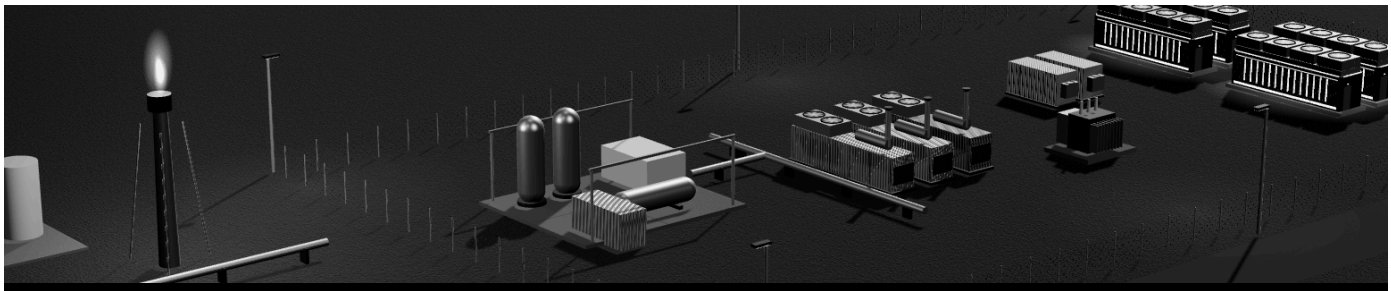

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=GAS&FLOW=0.88

THE MATH

Methane in 1.5 MMcf/d of flared gas, as pipeline-quality gas	0.88 MMcf/d
Energy in the gas	38.0 MMBtu per hour
Power at a heat rate of 9,000 Btu/kWh	about 4.2 MW
Compute (power less cooling and losses, /1.2)	about 3.5 MW
Compute modules (about 1 MW each)	4
Gas engines (running plus one spare)	3 at 2.5 MW
Land: 5 acres plus 1.2 acres per MW	about 10 acres
Gas bought per year (95% run time)	316k MMBtu
Gas payment, up to $0.75/MMBtu	up to $237k
Land lease at $1,000 to $2,000 per acre per year	$10k to $20k

Sized on the methane only: 1.5 MMcf/d at about 60% methane and 1,012 Btu per cubic foot, shown as 0.88 MMcf/d of pipeline-quality gas at 1,037 Btu. Heavier gases would add energy and are not counted. Prices in US dollars; field gas at $0 to $0.75 per MMBtu.

WHAT IT WOULD LOOK LIKE

- Gas engines on a small parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Whether the flaring well will be tied in soon
- Gas analysis at the pad
- A small fenced parcel near the pad
- Fiber route

Source: North Dakota DMR monthly production report, August 2026: the pad flared about 3.0 MMcf/d (July 3.5). Sized on 1.5 MMcf/d. Methane share of 60% is a Bakken basin figure (DOE NETL); the sizing counts the methane only. This is a first read from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.