
# Mine gas at Buck Creek Mine, Sullivan County, Indiana: site sizing

What this gas could power, how much land it would take, and what it could earn each year.

| 1.7 MW | 2 | 7 ac | 129k |
|---|---|---|---|
| POWER FROM THE GAS | COMPUTE MODULES | LAND NEEDED | MMBTU BOUGHT / YR |

| GAS SALE, PER YEAR | LAND LEASE, PER YEAR | TOTAL TO THE OWNER, PER YEAR |
|---|---|---|
| up to $388k | $7k to $14k | $7k to $402k |

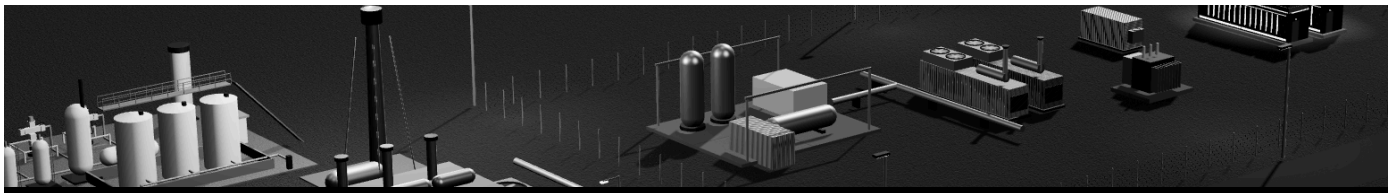

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=GAS&FLOW=0.36

## THE MATH

| | |
|---|---|
| Mine methane flared at the project's enclosed flares, Sep 2024 to Aug 2025, estimated from ARB offset credits, as pipeline-gas equivalent | 0.36 MMcf/d |
| Energy in the gas | 15.6 MMBtu per hour |
| Power at a heat rate of 9,000 Btu/kWh | about 1.7 MW |
| Compute (power less cooling and losses, /1.2) | about 1.4 MW |
| Compute modules (about 1 MW each) | 2 |
| Gas engines (running plus one spare) | 2 at 2.5 MW |
| Land: 5 acres plus 1.2 acres per MW | about 7 acres |
| Gas bought per year (95% run time) | 129k MMBtu |
| Gas payment, up to $3.00/MMBtu | up to $388k |
| Land lease at $1,000 to $2,000 per acre per year | $7k to $14k |

Methane only, estimated from ARB offset credits issued for Sep 1 2024 to Aug 31 2025: credits / 22.12 per metric ton x 52,071 cubic feet per ton = over 360 Mcf/d (about 0.36 MMcf/d pipeline-gas equivalent). The registry data report could not be opened, so this is an estimate, likely a floor. Prices in US dollars.

## WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

## WORTH CHECKING

- Daily flow and methane by well for 12 to 24 months
- Engines as qualifying destruction devices under the ARB Mine Methane Capture protocol (93.6% credited, against 99.5% for flares); credits stay with the project and the flares stay as backup
- Indiana IDEM Office of Air Quality permit for the engines (326 IAC 2), and Sullivan County zoning for the pad
- Gas rights holder for the closed mine, and the surface lease for the engine pad

**Source:** California Air Resources Board, ARB Offset Credit Issuance table (updated Nov 10 2026), project CAMM6989 / CAR1989, reporting period 2, 56,652 credits: https://ww2.arb.ca.gov/sites/default/files/2022-07/nc-arboc_issuance.xlsx (seen 2026-11-13). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.