
Cresson Mine drainage gas (CMMC3), Cambria County, Pennsylvania: site sizing

What this gas could power, how much land it would take, and what it could earn each year.

2.4 MW	3	8 ac	180k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $539k	$8k to $16k	$8k to $555k

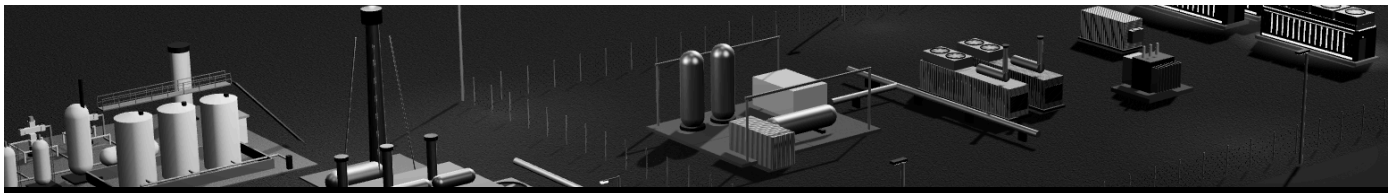

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=GAS&FLOW=0.5

THE MATH

Mine gas drained from in-mine boreholes and burned in the project's enclosed flares, Oct 2024 to May 2025, as pipeline-gas equivalent	0.5 MMcf/d
Energy in the gas	21.6 MMBtu per hour
Power at a heat rate of 9,000 Btu/kWh	about 2.4 MW
Compute (power less cooling and losses, /1.2)	about 2.0 MW
Compute modules (about 1 MW each)	3
Gas engines (running plus one spare)	2 at 2.5 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	180k MMBtu
Gas payment, up to $3.00/MMBtu	up to $539k
Land lease at $1,000 to $2,000 per acre per year	$8k to $16k

About 545 Mcf/d of drained mine gas at about 95% methane (two metered devices over 227 days) is about 516 Mcf/d of methane. Only the methane is counted, shown as its pipeline-gas equivalent at 1,037 Btu per cubic foot: about 0.50 MMcf/d. Prices in US dollars.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Daily flow and methane by device for 12 to 24 months (one 227-day period so far; drainage follows the mining plan)
- Engines as qualifying destruction devices under the ARB Mine Methane Capture protocol; credits stay with the project (crediting period to May 31 2034)
- PA DEP Bureau of Air Quality permit for the engines, Bureau of Mine Safety equipment approval and the MSHA mine ventilation plan
- Gas rights: the mine owner holds the methane rights and the project operator the capture rights

Source: ARB Mine Methane Capture offset project data report, CMMC3 (CARB CAMM1167 / ACR1167), Oct 17 2024 to May 31 2025, ACR registry: https://greentrace.ice.com/acr/projects/registry/ACR_REGISTRY/project/P2323C9VJV24 ; credits match the ARB Offset Credit Issuance table (seen 2026-11-13). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.