
Eagle Point Landfill, Ball Ground, Georgia: site sizing

What the gas the site now flares could power, how much land it would take, and what it could earn each year.

12.4 MW	11	20 ac	1,132k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $3.39M	$20k to $40k	$20k to $3.43M

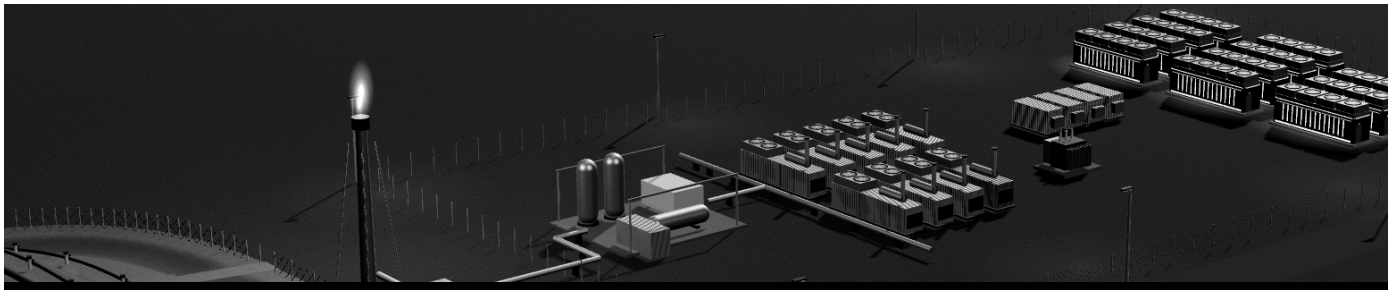

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=LFG&FLOW=5599&CH4=40.3

THE MATH

Landfill gas collected and flared (2023)	5,599 scfm
Methane content (2023)	40.3%
Energy in the gas	136.0 MMBtu per hour
Power at a heat rate of 11,000 Btu/kWh	about 12.4 MW
Compute (power less cooling and losses, /1.2)	about 10.3 MW
Compute modules (about 1 MW each)	11
Gas engines (running plus one spare)	9 at 1.6 MW
Land: 5 acres plus 1.2 acres per MW	about 20 acres
Gas bought per year (95% run time)	1,132k MMBtu
Gas payment, up to $3.00/MMBtu	up to $3.39M
Land lease at $1,000 to $2,000 per acre per year	$20k to $40k

Landfill gas: about 1,012 Btu per cubic foot of methane. Prices in US dollars; the price band is the one shown on our Site model page.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Whether the gas is set aside for a renewable natural gas project
- Gas-system repairs under way around Cell 18
- Gas quality (siloxanes, H2S) for engines
- Space for a fenced parcel near the flare

Source: EPA Greenhouse Gas Reporting Program (GHGRP): about 5,599 scfm collected in 2023 at 40.3% methane (5,599 to 5,916 scfm in 2019-2023). EPA LMOP lists all of it as flared, with no energy project. This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.