
Mine gas at North Eagle Mine (Maple Fork), Boone County, West Virginia: site sizing

What this gas could power, how much land it would take, and what it could earn each year.

2.4 MW	3	8 ac	183k
POWER FROM THE GAS	COMPUTE MODULES	LAND NEEDED	MMBTU BOUGHT / YR

GAS SALE, PER YEAR	LAND LEASE, PER YEAR	TOTAL TO THE OWNER, PER YEAR
up to $550k	$8k to $16k	$8k to $566k

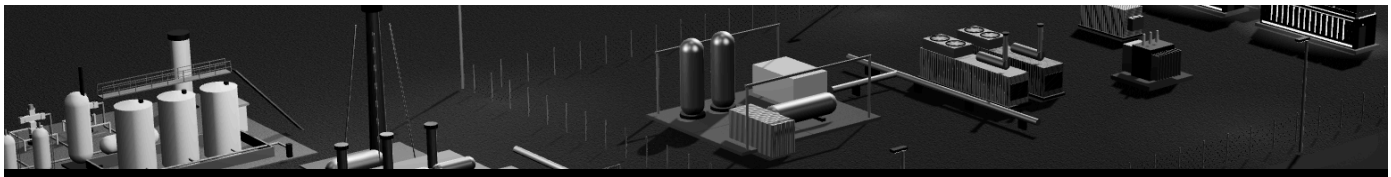

YOUR SITE IN OUR LIVE 3D MODEL — ACCRETIONCOMPUTE.COM/SITE-MODEL?SRC=GAS&FLOW=0.51

THE MATH

Mine methane flared at the project's enclosed flares, Aug 2025 to Mar 2026, estimated from ARB offset credits, as pipeline-gas equivalent	0.51 MMcf/d
Energy in the gas	22.0 MMBtu per hour
Power at a heat rate of 9,000 Btu/kWh	about 2.4 MW
Compute (power less cooling and losses, /1.2)	about 2.0 MW
Compute modules (about 1 MW each)	3
Gas engines (running plus one spare)	2 at 2.5 MW
Land: 5 acres plus 1.2 acres per MW	about 8 acres
Gas bought per year (95% run time)	183k MMBtu
Gas payment, up to $3.00/MMBtu	up to $550k
Land lease at $1,000 to $2,000 per acre per year	$8k to $16k

Methane only, estimated from ARB offset credits issued for Aug 15 2025 to Mar 31 2026: credits / 22.12 per metric ton x 52,071 cubic feet per ton = over 520 Mcf/d (about 0.51 MMcf/d pipeline-gas equivalent). The registry data report could not be opened, so this is an estimate, likely a floor. Prices in US dollars.

WHAT IT WOULD LOOK LIKE

- Our own gas engines on a fenced parcel near the gas, a battery to smooth the load, and factory-built compute modules leased to an AI company.
- No grid connection and no export: all of the power is used on site.
- We build and run the site. The owner puts in no capital.
- Multi-year gas and land agreements, matched to the tenant's lease, at a fixed price.

WORTH CHECKING

- Daily flow and methane by well for 12 to 24 months, from the metered flares
- Engines as qualifying destruction devices under the ARB Mine Methane Capture protocol (93.6% credited, against 99.5% for flares); credits stay with the project
- WV DEP Division of Air Quality Rule 13 permit for the engines
- Active mine: MSHA ventilation plan approval and WV Office of Miners' Health, Safety and Training for any gob well change
- Gas rights holder (mine owner) and the borehole plan: gob gas rises and falls as panels are mined

Source: California Air Resources Board, ARB Offset Credit Issuance table, project CAMM7284 / CAR2284, reporting period 1, 50,902 credits: https://ww2.arb.ca.gov/sites/default/files/2022-07/nc-arboc_issuance.xlsx (seen 2026-11-13). The 22.12 factor matches two metered ARB offset project data reports (Mine 84, CMMC3; ACR registry). This is an estimate from public data, not an offer: no cost and no obligation. The real price and terms are set in the gas and land agreements after a site review.